

Please refer to our website glossary for all terms and additional feature definitions

CUSTOMER DETAILS:


Customer:
Enquiry Origin (Country):
Address:

Date:
Contact Name:
Telephone:
E-mail:
Web Site:

TYPE OF BUSINESS: Manufacturer (OEM): Distributor: Individual (Private Use):

SPECIFY APPLICATION TYPE:

Projected Annual Quantity:

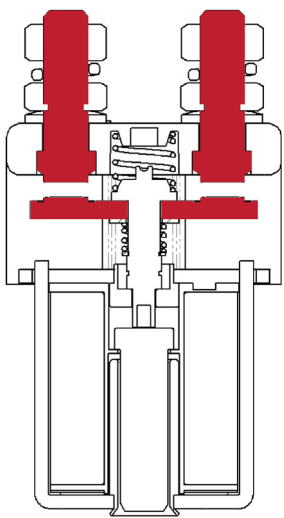

MAIN CONTACT CONFIGURATION (SELECT THE APPROPRIATE BOXES):

Single Pole (1P) Double Pole (2P) Changeover
Normally Open (N.O.) Normally Closed (N.C.) Motor Reverse
Other (Explain) _____


State Contactor Type number (if known):

MAIN CONTACT LOADS:

	<i>Ie</i> Current (A):	<i>Duration</i> (Minutes):	<i>Ue</i> Voltage (V):	<i>Duration</i> (Minutes):
Nominal				
Minimum				
Maximum				

TYPE OF LOAD:

Resistive: Contacts Closing on Load: Yes No
Inductive: Contacts Opening on Load: Yes No
Capacitive: Approximate Closing Load (A): _____
Approximate Opening Load (A): _____

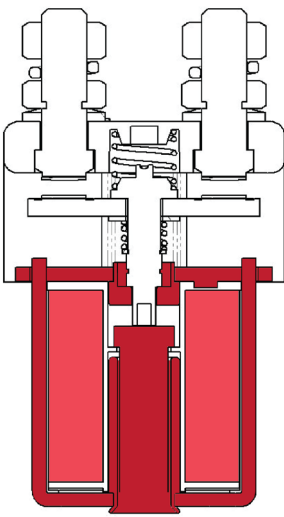


COIL RATING: *Us* Voltage (V): *Duration* (Minutes): *Ambient Temperature* (Deg C.):

	<i>Us</i> Voltage (V):	<i>Duration</i> (Minutes):	<i>Ambient Temperature</i> (Deg C.):
Nominal			
Minimum			
Maximum			
Maximum Inrush current			

COIL OPERATION:

Continuous (CO) [100% Duty]: Prolonged (PO) [90% Duty]:
Intermittent (INT) [70% Duty]: High Powered (HO) [25% Duty]:

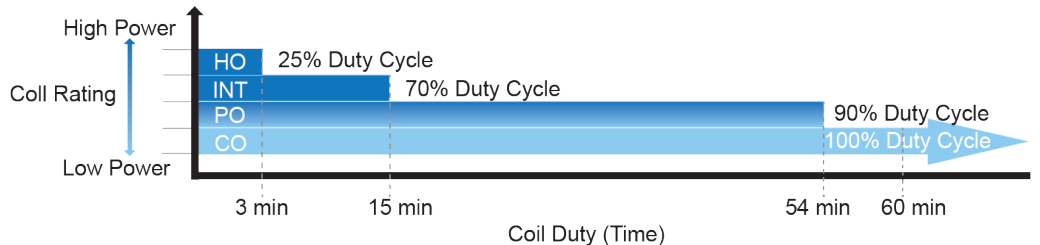


Frequency of Switching: No. of Cycles _____ per Seconds / Minutes / Hours / Days

Duty Cycle: On Time in Seconds / Minutes / Hours / Days
Off Time in Seconds / Minutes / Hours / Days

Please indicate unit of measure by circling appropriate value

Environmental Considerations (e.g. humidity, moisture): _____



ADDITIONAL FEATURES:

Feature:	Select as Appropriate:	Suffix:
1. Coil Suppression (If required, specify type in Notes)	<input type="radio"/>	-
2. AC Rectifier Board	<input type="radio"/>	-
3. Vacuum Impregnation	<input type="radio"/>	-
4. Auxiliary Contacts - V3 or V4	<input type="radio"/>	C
5. Auxiliary Contacts	<input type="radio"/>	A
6. Large Contact Tips	<input type="radio"/>	L
7. Textured Contact Tips	<input type="radio"/>	T
8. Silver Plating	<input type="radio"/>	-
9. Magnetic Blowouts	<input type="radio"/>	B
10. Enclosed Contact Housing / Dust Shields	<input type="radio"/>	-
11. Magnetic Latching	<input type="radio"/>	M
12. 6.3mm Spade Terminals	<input type="radio"/>	-
13. Armature Cap	<input type="radio"/>	-
14. Manual Override Operation	<input type="radio"/>	-
15. M4 Stud Terminals (Miniature Series & P Types)	<input type="radio"/>	-
16. M5 Terminal Board	<input type="radio"/>	-
17. Flying Leads (If required, specify length)	<input type="radio"/>	F
18. JPT Plug connection	<input type="radio"/>	-
19. Fuseholder	<input type="radio"/>	-
20. EE Type (Steel Shrouds)	<input type="radio"/>	EE
21. IP66 or IP67 Environmentally Protected (where available)	<input type="radio"/>	P

If brackets are required, please select type:

Further mounting options available via:

www.albrightinternational.com



Mounting Attitude:

Horizontal: Vertical: Other:

NOTES: